

NYM

STANDARD

DIN VDE 0250-204


FOREIGN ANALOGUE

ВВГ з стандарт 16642-80

**Cable with Copper core, polyvinylchloride insulation, and polyvinylchloride sheath**

#### APPLICATION

The industrial and power from a stationary installation inside the building and on the air. Out of buildings can be used if there is no sunlight influence on cables. Can be used on the wall or under, dry, damp and wet buildings. It can be laying into channels without influence of stretching forces. Cable has a filler, it is fire residence and flexible

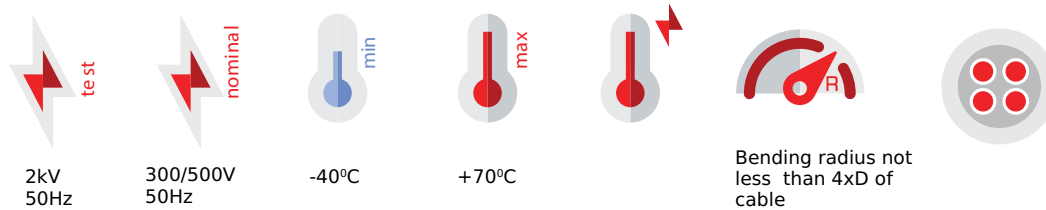

- Installation temperature: -5°C.
- The conductor is resistant to 98% relative air humidity under +35°C conditions
- Conductive lobe for long-term allowable heating temperature +70°C.

#### CONSTRUCTION

The copper cores with section 1,5-6mm<sup>2</sup> inclusive are produced with single wire of 1 class flexibility, 10-35mm<sup>2</sup> inclusive with twisted multi-core wires ( 7 wires) of 2 class flexibility, according to standard 22483-2012 ( IEC 60228-2014) Number of cores in the cable 1:5

#### THE CONSTRUCTION LENGTH OF THE CABLES

not less than 100m

The construction length of the cable may be agreed with the customer

#### PACKING

On wooden drum or bundles (coils).

#### LABELING

Label attached to wooden drum or bundle, or in case of request of the customer with inscription on top: "JSC Sakcable" cable brand, manufacture year. Labeling of conductive cores with colors or figures 0,1,2,3,4 with inscription on the top of insulated cores

#### SERVICE LIFETIME


not less than 30 years

#### WARRANTY PERIOD

5 years after entering into exploitation, In the proper installation and working conditions

**NYM DIN VDE 0250-204**

Part Name	Conductor resistance [Ω/km]	Ampacity (in air) [A]	Thickness of insulation [mm]	Thickness of sheath [mm]	Outer diameter [mm]	Bending radius [mm]	Copper Weight [kg/km]	Weight [kg/km]
2X1.5 re	12,1	19	0,6	1,4	8,8	35	26,80	123,89
2X2.5 re	7,41	27	0,7	1,4	9,6	38	44,60	168,6
3X1.5 re	12,1	19	0,6	1,4	9,2	37	41,4	141,57
3X2.5 re	7,41	25	0,7	1,4	10,1	40	68,9	196,27
3X4 re	4,64	35	0,8	1,4	11,0	44	110	291,18
3x6 re	3,08	42	0,8	1,6	13,2	53	164,85	403,2
3x10 rm	1,83	55	1,0	1,6	17,2	69	274,7	670,24
4X1.5 re	12,1	17	0,6	1,4	9,9	40	55,2	183,47
4X2.5 re	7,41	23	0,7	1,4	10,8	43	91,87	253,36
4X4 re	4,64	32	0,8	1,4	11,9	48	146,67	360,33
4x6 re	3,08	39	0,8	1,6	14,2	57	219,8	500,91
4x10 rm	1,83	51	1,0	1,6	18,5	74	366,26	843,25
5X1.5 re	12,1	17	0,6	1,4	10,5	42	69,01	224,21
5X2.5 re	7,41	23	0,7	1,4	11,6	46	114,85	309,72
5X4 re	4,64	32	0,8	1,4	12,4	50	183,34	439,09
5x6 re	3,08	39	0,8	1,6	15,2	61	274,75	596,88
5x10 rm	1,83	51	1,0	1,6	20,2	81	457,84	1019,24

 re - Single-core  
 rm - Multi-core