



S

STANDARD GOST 3241-91, 3063-90


FOREIGN ANALOGUE

C GOST 3241-91 | 3063-90

Cable (rope) twisted with steel wires.

APPLICATION

In coal mining, gas-and-oil producing industry, metallurgy, engineering, construction industry, sea and river transport. It can be used as lightning protection at high voltage lines.

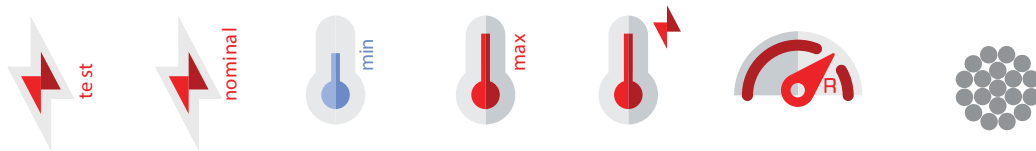

CONSTRUCTION

Steel cable (rope) is made of galvanized steel wire (number of wires 19) twisted as single or in layers and is covered with anti-corrosive temperature resistant lubricant material.

THE CONSTRUCTION LENGTH OF THE CABLE

agreed with the customer.

Deviation from length is possible: up to 400m +5%, above 400m +20%.

PACKING On wooden drum or bundles (coils).

LABELING

Label attached to wooden drum or bundle (coils).

SERVICE LIFETIME

not less than 25 years

WARRANTY PERIOD

2 years

S GOST 3241-91, 3063-90

Part Name	Cross-Sectional area [mm ²]	Outer diameter [mm]	Tensile strength	Weight without lubricant [kg/km]
C-35	33,82	7,6	41650	270
C-40	38,46	8,1	44400	310
C-45	43,4	8,6	53550	350
C-50	48,64	9,1	59950	390
C-60	60,35	10	74450	485
C-70	72,92	11	89950	585